

NAVIGATION LIGHTS

FOR USE ON VESSELS UNDER 20 METERS (65.6 FT.) IN LENGTH.

FEATURES

BASE MOUNT. BLACK PLASTIC.

COMPLETE WITH 12, 24 OR 32 VOLT BULB.

Height Overall Inches	O.D. Base Inches	Height Lens Inches	Screw Size	Weight Ounces
4-7/8	3-5/16	2-3/4	10	9-1/2

ORDERING INFORMATION

FOR 12 VOLT LIGHTS

Description	Visibility Arc	Display Pkg. - 5 Cards 1 Pc. per Card	Std. Pkg. - 1 Pc. OEM Pkg. - 10 Pcs.	Visibility Miles	Replacement Bulb
Bi-Color Light	225°	200 BB DP1	200 BB 12V	2	375 12V 25W
Red Side Light	112-1/2°	200 PB DP1	200 PB 12V	2	375 12V 25W
Green Side Light	112-1/2°	200 SDB DP1	200 SDB 12V	2	375 12V 25W
White Masthead Light	225°	200 MB DP1	200 MB 12V	3	375 12V 25W
White Stern Light	135°	200 SNB DP1	200 SNB 12V	2	375 12V 10W
Yellow Towing Light	135°	200 TWB DP1	200 TWB 12V	2	375 12V 10W
White All-Round Light	360°	200 SWB DP1	200 SWB 12V	2	375 12V 10W
Red All-Round Light	360°	200 SRB DP1	200 SRB 12V	2	375 12V 25W
Green All-Round Light	360°	200 SGB DP1	200 SGB 12V	2	375 12V 25W
Tri-Color Light*	360°	200 TB DP1	200 TB 12V	2	375 12V 25W

*For Use on Vessels Under Sail Alone.

FOR 24 VOLT LIGHTS

Replace the "DP1" with "DP2" For Display Package or the "12V" with "24V" For Standard Package or OEM Package (e.g., 200 BB DP2 or 200 BB 24V). For the Replacement Bulb, Replace the "12V" with "24V" (e.g., 375 24V 25W and 375 24V 10W).

FOR 32 VOLT LIGHTS

Replace the "DP1" with "DP3" For Display Package or the "12V" with "32V" For Standard Package or OEM Package (e.g., 200 BB DP3 or 200 BB 32V). For the Replacement Bulb, Replace the "12V" with "32V" (e.g., 375 32V 25W and 375 32V 10W).

FIG. 200 SERIES BASE MOUNT



FIG. 200 SNB



FIG. 200 TWB



FIG. 200 SGB

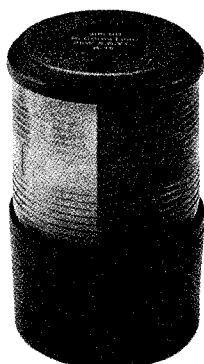


FIG. 200 DP

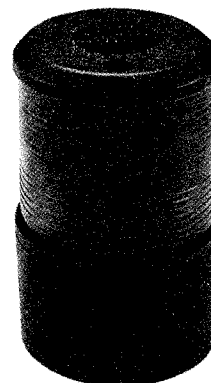


FIG. 200 SRB