

Twin-Path® Extra Covermax Slings


Twin-Path® Extra Slings

Twin-Path® Extra Slings are constructed of high performance load carrying yarns.

The load carrying yarns are protected by two independent, seamless, color coded, polyester covers.

The internal red cover is protected by the outer orange cover.

The sling cover is fabricated in such a way that it is actually two complete and separate slings in one. Each path makes its own separate connection between the lifting hook and the load. This unique back up system is designed to provide the sling user with sufficient reaction time to maintain control of the load if damage to one of the paths went undetected.

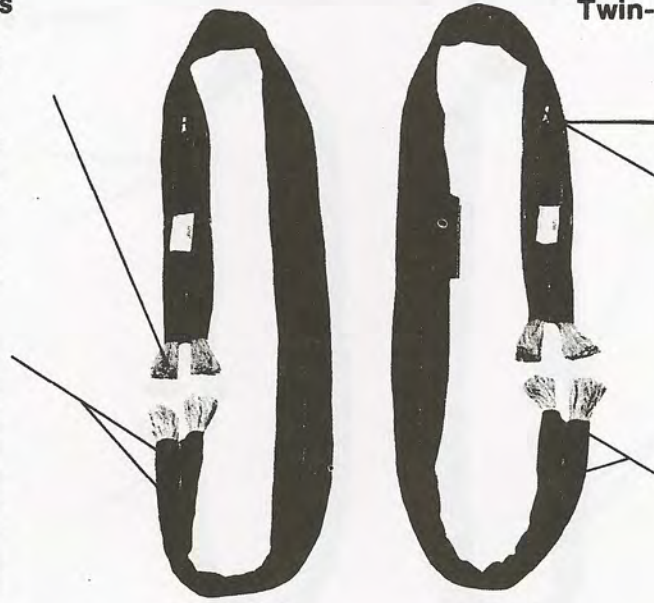

ORANGE **GRAY**
Polyester Cover Covermax Cover

A leather tag contains required Information — And the Flag Tag contains the Vertical Capacity in Large Readable Characters.

Twin-Path® Extra Covermax Slings

Twin-Path® Extra Covermax Slings are constructed of high performance load carrying yarns.

Orange Tag Patch - High Performance Load Yarns.

Tell Tails - When Twin-Path® Extra and Twin-Path® Extra Covermax Slings are loaded beyond their rated capacity, the indicator tails shrink until they finally disappear under the cover.

The load carrying yarns are protected by two independent, seamless, color coded, covers.






The internal polyester red cover is protected by an outer gray cover of Covermax nylon.

Sleeves can be sewn around the body of the sling so that they can be positioned to the areas where they are needed.

TWIN-PATH® EXTRA & TWIN-PATH® EXTRA COVERMAX SPECIFICATIONS

United States Patent
#4,850,629

Canadian Patent
#1,280,458

Twin-Path® Extra Stock No.	Twin-Path® Extra Covermax Stock No.	Rated Capacities (Lbs.) 5-1 D/F					Approximate Weight (Lbs. Per Ft.) (Bearing-Bearing)	Approximate Body Width (Inches)
		Choker	Vertical	Basket Hitches				
				0° 	60° 	45° 		
TPX 1000	TPXC 1000	8,000	10,000	20,000	17,320	14,140	.31	3"
TPX 1500	TPXC 1500	12,000	15,000	30,000	25,980	21,210	.40	3"
TPX 2000	TPXC 2000	16,000	20,000	40,000	34,640	28,280	.55	3"
TPX 2500	TPXC 2500	20,000	25,000	50,000	43,300	35,350	.65	4"
TPX 3000	TPXC 3000	24,000	30,000	60,000	51,960	42,420	.80	4"
TPX 4000	TPXC 4000	32,000	40,000	80,000	69,280	56,560	1.12	5"
TPX 5000	TPXC 5000	40,000	50,000	100,000	86,139	70,700	1.50	5"
TPX 6000	TPXC 6000	48,000	60,000	120,000	103,920	84,840	1.60	6"
TPX 7000	TPXC 7000	56,000	70,000	140,000	121,240	98,980	1.68	6"
TPX 8500	TPXC 8500	68,000	85,000	170,000	147,220	120,190	1.85	6"
TPX 10000	TPXC 10000	80,000	100,000	200,000	173,200	141,400	2.20	6"
TPX 12500	TPXC 12500	100,000	125,000	250,000	216,500	176,750	3.00	8"
TPX 15000	TPXC 15000	120,000	150,000	300,000	259,800	212,100	3.36	8"
TPX 17500	TPXC 17500	140,000	175,000	350,000	303,100	247,450	4.00	10"
TPX 20000	TPXC 20000	160,000	200,000	400,000	346,400	282,800	4.37	10"
TPX 25000	TPXC 25000	200,000	250,000	500,000	433,000	353,500	5.50	11"
TPX 27500	TPXC 27500	220,000	275,000	550,000	476,300	388,850	6.90	11"
TPX 30000	TPXC 30000	240,000	300,000	600,000	519,600	424,200	7.50	13"

PLEASE NOTE: Capacities shown include both paths and are for one complete sling. Ratings based on straight pin diameter one-half the sling width.

DO NOT EXCEED RATED CAPACITY

DO NOT EXCEED RATED CAPACITY