
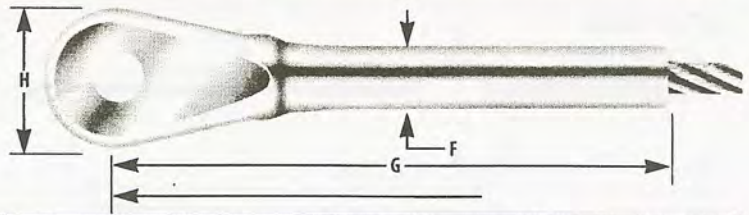


Aircraft Jaw Fitting (MS20667)



AVAILABLE IN STAINLESS STEEL ONLY.

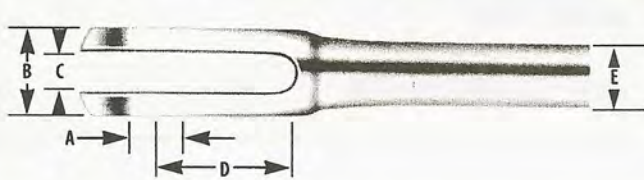

Part No.	Cable Dia.	Min. Break Str. Lbs.	A		B	C	D	E	F		G Ref.	H
			Dia.	Tol.	+010 -005	± .003			Dia.	Tol.		
MS20667-2	1/16	480	.190	+002 -000	.218	.093	.500	.160	.138	+000 -005	1.750	.344
MS20667-3	3/32	920	.190	+002 -000	.254	.108	.670	.218	.190	+000 -005	2.062	.438
MS20667-4	1/8	2000	.190	+002 -000	.383	.195	.735	.250	.219	+000 -005	2.608	.547
MS20667-5	5/32	2800	.250	+002 -000	.406	.202	.800	.297	.250	+000 -005	3.000	.688
MS20667-6	3/16	4200	.313	+002 -000	.543	.260	.880	.359	.313	+000 -005	3.239	.781
MS20667-7	7/32	5600	.313	+002 -000	.625	.296	.970	.427	.375	+000 -007	3.736	.906
MS20667-8	1/4	7000	.375	+002 -000	.688	.313	1.070	.494	.438	+000 -007	4.105	.969
MS20667-9	9/32	8000	.438	+002 -000	.719	.327	1.170	.563	.500	+000 -008	4.479	1.156
MS20667-10	5/16	9800	.438	+002 -000	.765	.348	1.268	.635	.563	+000 -008	4.860	1.265
MS20667-12	3/8	14400	.500	+005 -000	.830	.380	1.525	.703	.625	+000 -008	5.746	1.500
MS20667-14	7/16	17600	.562	+005 -000	.830	.380	1.776	.781	.688	+000 -008	6.575	1.750

Aircraft Eye Fitting (MS20668)

AVAILABLE IN STAINLESS STEEL ONLY.

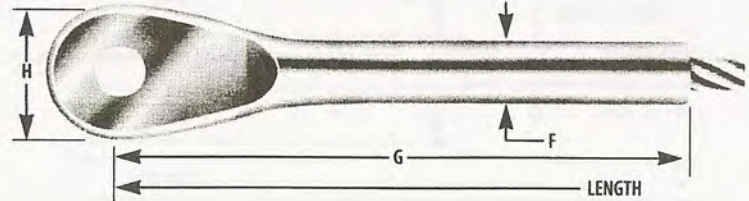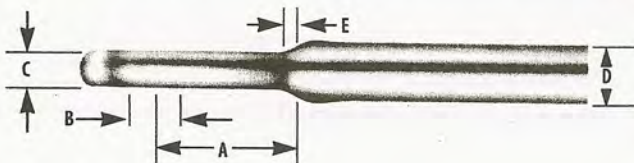

Part No.	Cable Dia.	Min. Break Str. Lbs.	A ± .020	B		C		D	E	F		G Ref.	H
				Dia.	Tol.	Dia.	Tol.			Dia.	Tol.		
MS20668-2	1/16	480	.523	.190	+002 -000	.088	+000 -005	.160	.072	.138	+000 -005	1.809	.359
MS20668-3	3/32	920	.707	.190	+002 -000	.103	+000 -005	.218	.092	.190	+000 -005	2.160	.438
MS20668-4	1/8	2000	.738	.190	+002 -000	.190	+000 -005	.250	.103	.219	+000 -005	2.593	.500
MS20668-5	5/32	2800	.831	.250	+002 -000	.197	+000 -005	.297	.131	.250	+000 -005	3.029	.640
MS20668-6	3/16	4200	.903	.313	+002 -000	.255	+000 -005	.359	.155	.313	+000 -005	3.187	.781
MS20668-7	7/32	5600	1.007	.313	+002 -000	.291	+000 -005	.427	.187	.375	+000 -007	3.678	.813
MS20668-8	1/4	7000	1.133	.375	+002 -000	.307	+000 -005	.494	.221	.438	+000 -007	4.062	.968
MS20668-9	9/32	8000	1.257	.438	+002 -000	.322	+000 -005	.563	.251	.500	+000 -008	4.512	1.109
MS20668-10	5/16	9800	1.373	.438	+002 -000	.343	+000 -005	.635	.281	.563	+000 -008	4.969	1.218
MS20668-12	3/8	14400	1.688	.500	+005 -000	.375	+000 -015	.703	.320	.625	+000 -008	5.968	1.500
MS20668-14	7/16	17600	1.968	.562	+005 -000	.375	+000 -015	.781	.350	.688	+000 -008	6.867	1.750