


STAINLESS & SPECIALTY CHAINS

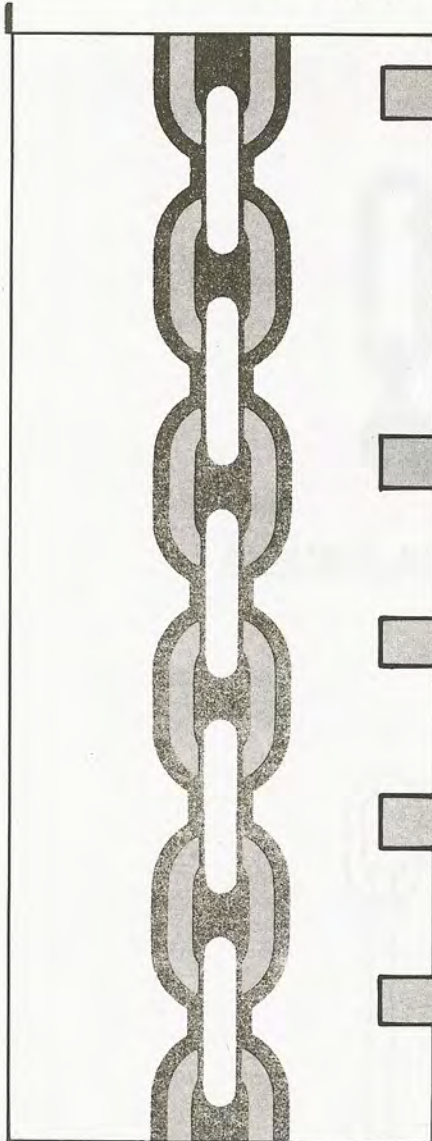


316 STAINLESS (MARINE & CORROSIVE ENVIRONMENTS)					
SIZE	INSIDE WIDTH (Ins.)	INSIDE LENGTH (Ins.)	POUNDS (per ft.)	WORKING LOAD (lbs.)	
.13	.29	.89	.22	375	
.19	.40	.95	.40	750	
.25	.50	1.00	.71	1250	
.31	.50	1.10	1.05	1900	
.38	.62	1.23	1.50	2650	
.50	.81	1.50	2.70	4500	
.63	.87	2.12	3.57	7500	
.75	1.12	2.43	5.29	9000	
.88	1.37	2.75	7.88	10750	
1	1.62	3.00	9.87	12500	

304 STAINLESS (MARINE ENVIRONMENTS, NON-MAGNETIC)					
SIZE	INSIDE WIDTH (Ins.)	INSIDE LENGTH (Ins.)	POUNDS (per ft.)	WORKING LOAD (lbs.)	
.50	.81	1.75	2.31	4200	
.63	.87	2.12	3.57	7500	
.75	1.12	2.43	5.29	9000	
.88	1.37	2.75	7.88	10750	
1	1.62	3.00	9.87	12500	

ALLOY 20 (HOT ACIDS, HIGH TEMPERATURE)					
SIZE	INSIDE WIDTH (Ins.)	INSIDE LENGTH (Ins.)	POUNDS (per ft.)	WORKING LOAD (lbs.)	
.50	.81	1.75	2.35	5250	
.63	.87	2.12	3.63	9375	
.75	1.12	2.43	5.38	11250	
.88	1.37	2.75	8.02	13500	
1	1.62	3.00	10.04	15500	

MONEL 400 (CAUSTICS, CHLORINATED SOLVENTS)					
SIZE	INSIDE WIDTH (Ins.)	INSIDE LENGTH (Ins.)	POUNDS (per ft.)	WORKING LOAD (lbs.)	
.50	.81	1.75	2.58	3000	
.63	.87	2.12	3.98	5400	
.75	1.12	2.43	5.90	6500	
.88	1.37	2.75	8.78	7700	
1	1.62	3.00	11.00	9000	

INCALLOY (EXTREME TEMPS, SULPHURICS, NITRICS)					
SIZE	INSIDE WIDTH (Ins.)	INSIDE LENGTH (Ins.)	POUNDS (per ft.)	WORKING LOAD (lbs.)	
.50	.81	1.75	2.34	4200	
.63	.87	2.12	3.62	7500	
.75	1.12	2.43	5.36	9000	
.88	1.37	2.75	7.99	10750	
1	1.62	3.00	10.02	12500	

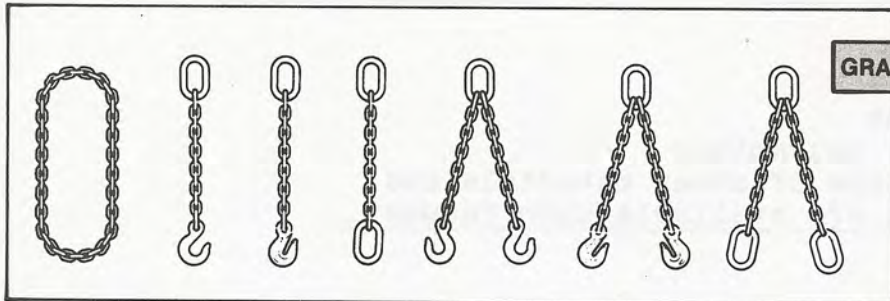

GRADE 316 STAINLESS CHAIN ASSEMBLIES

CHAIN SIZE	WORKING LOAD LIMITS (lbs.)		
	ENDLESS	SINGLE	DOUBLE
.19	750	750	1300
.25	1250	1250	2150
.38	2650	2650	4600
.50	4500	4500	7800

Contact our Technical Department for specific applications. Certified magnetic permeability, passivation and special load testing are available from the factory. Fittings and custom components can be manufactured.

We also manufacture abrasion resistant chain & hangers for shot blast applications.

TRIPLES, QUADS AND OTHER STYLES AVAILABLE.