


Crosby® Forged Swivels

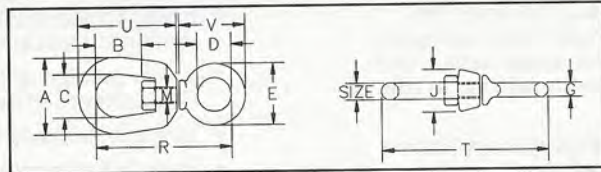


CHAIN SWIVELS

Size (in.)	G-401 Stock No. Galv.	Working Load Limit* (lbs.)	Weight Each (lbs.)	Dimensions (in.)											
				A	B	C	D	E	G	J	M	R	T	U	V
1/4	1016233	850	.13	1.25	.69	.75	.62	1.12	.25	.69	.31	2.25	2.75	1.69	1.25
5/16	1016251	1250	.25	1.63	.81	1.00	.75	1.38	.31	.81	.38	2.72	3.34	2.06	1.47
3/8	1016279	2500	.61	2.00	.94	1.25	1.00	1.75	.38	1.00	.50	3.44	4.19	2.50	1.88
1/2	1016297	3600	1.12	2.50	1.31	1.50	1.25	2.25	.50	1.31	.63	4.25	5.25	3.19	2.44
5/8	1016313	5200	1.75	3.00	1.56	1.75	1.50	2.75	.62	1.50	.75	5.13	6.31	3.88	2.94
3/4	1016331	7200	3.09	3.50	1.75	2.00	1.75	3.25	.75	1.88	.88	5.78	7.22	4.94	3.46

* Ultimate Load is 5 times the Working Load Limit.



G-401
Hot Dip Galvanized
Quenched & Tempered

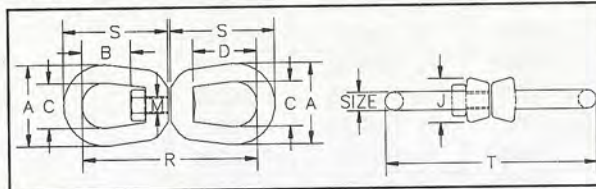

REGULAR SWIVELS


Size (in.)	G-402 Stock No. Galv.	Working Load Limit* (lbs.)	Weight Each (lbs.)	Dimensions (in.)								
				A	B	C	D	J	M	R	S	T
1/4	1016019	850	.21	1.25	.69	.75	1.06	.69	.31	2.94	1.69	3.44
5/16	1016037	1250	.39	1.63	.81	1.00	1.25	.81	.38	3.56	2.06	4.19
3/8	1016055	2250	.75	2.00	.94	1.25	1.50	1.00	.50	4.31	2.50	5.06
1/2	1016073	3600	1.43	2.50	1.31	1.50	2.00	1.31	.63	5.44	3.19	6.44
5/8	1016091	5200	2.50	3.00	1.56	1.75	2.38	1.50	.75	6.56	3.88	7.81
3/4	1016117	7200	4.13	3.50	1.75	2.00	2.63	1.88	.88	7.19	4.31	8.69
7/8	1016135	10000	6.25	4.00	2.06	2.25	3.06	2.13	1.00	8.38	5.00	10.13
1	1016153	12500	9.00	4.50	2.31	2.50	3.50	2.38	1.13	9.63	5.75	11.63
1 1/4	1016199	18000	16.37	5.63	2.69	3.13	3.69	3.00	1.38	11.13	6.75	13.36
1 1/2	1016215	45200	49.06	7.00	4.19	4.00	4.19	4.00	2.25	17.13	10.00	20.13



G-402
Hot Dip Galvanized
Quenched & Tempered

Meets the requirements of Federal Specifications RR-C-271D, Type VIII, Class 3 and RR-C-271D, Type VII, Class 2.

* Ultimate Load is 5 times the Working Load Limit.

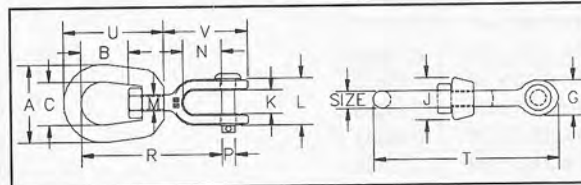

JAW END SWIVELS

Size (in.)	G-403 Stock No. Galv.	Working Load Limit* (lbs.)	Weight Each (lbs.)	Dimensions (in.)													
				A	B	C	G	J	K	L	M	N	P	R	T	U	V
1/4	1016395	850	.25	1.25	.69	.75	.69	.69	.47	1.03	.31	.88	.25	2.63	3.38	1.69	1.69
5/16	1016411	1250	.37	1.63	.81	1.00	.81	.81	.50	1.13	.38	.88	.31	2.94	3.88	2.06	1.81
3/8	1016439	2250	.70	2.00	.94	1.25	1.00	1.00	.63	1.41	.50	1.06	.38	3.63	4.75	2.50	2.25
1/2	1016457	3600	1.43	2.50	1.31	1.50	1.31	1.31	.75	1.75	.63	1.31	.50	4.50	6.06	3.19	2.88
5/8	1016475	5200	2.48	3.00	1.56	1.75	1.63	1.50	.94	2.06	.75	1.50	.63	5.31	7.31	3.88	3.44
3/4	1016493	7200	3.88	3.50	1.75	2.00	1.88	1.88	1.13	2.53	.88	1.75	.75	6.06	8.31	4.31	4.00
7/8	1016518	10000	5.75	4.00	2.06	2.25	2.13	2.13	1.19	2.75	1.00	2.06	.88	7.00	9.53	5.00	4.53
1	1016536	12500	10.25	4.50	2.31	2.50	2.63	2.38	1.75	3.72	1.13	2.81	1.13	8.56	11.69	5.75	5.94
1 1/4	1016572	18000	15.75	5.69	2.69	3.13	3.13	3.00	2.06	4.31	1.50	2.81	1.38	9.44	13.13	6.75	6.38
1 1/2	1016590	45200	54.75	7.00	4.19	4.00	5.63	4.00	2.88	6.00	2.25	4.44	2.25	14.74	20.84	10.00	10.84

* Ultimate Load is 5 times the Working Load Limit.



G-403
Hot Dip Galvanized
Quenched & Tempered

Meets the requirements of Federal Specifications RR-C-271D, Type VII, Class 1.