




Micro snap shackles are manufactured from investment cast 15-5PH Stainless Steel, resulting in a product that has excellent corrosion resistance and a high strength to weight ratio. The split ring at the end of the plunger pin is easy to grasp, and the profile of the shackle is designed for easy clearance of lines and fittings when released.

Five types of head configuration are available, each designed for a specific application. Using the right shackle makes for safer and more efficient sailing by protecting equipment from excessive strain.

Fixed Bail snap shackles suit applications where swivelling is not required.

MATERIALS:

- 15 - 5PH investment cast Stainless Steel

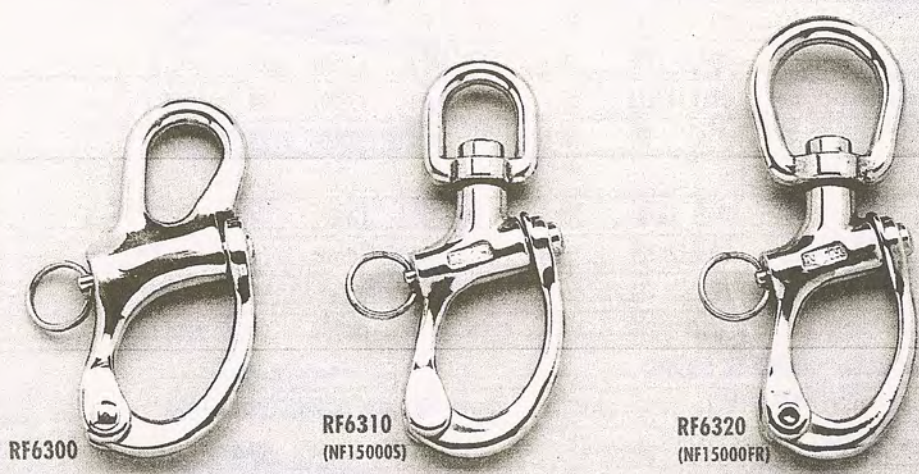

PRODUCT No.	C mm	C (in.)	E mm	E (in.)	L mm	L (in.)	DEFORMS AT kg	DEFORMS AT (lb)	
Series 100									
RF6100	16	(5/8)	15	(9/16)	66	(2 5/8)	1650	(3630)	4
RF6110	16	(5/8)	10	(3/8)	69	(2 11/16)	1135	(2497)	5
RF6120	16	(5/8)	13	(1/2)	73	(2 7/8)	1135	(2497)	5
Series 200									
RF6200	16	(5/8)	19	(3/4)	85	(3 3/8)	2268	(4990)	10
RF6210	16	(5/8)	16	(5/8)	92	(3 5/8)	2268	(4990)	11
RF6220	16	(5/8)	25	(1)	101	(4)	2268	(4990)	12
Series 300									
RF6300	26	(1)	19	(3/4)	100	(3 15/16)	3175	(6985)	15
RF6310	26	(1)	16	(5/8)	110	(4 5/16)	3175	(6985)	14
RF6320	26	(1)	26	(1)	122	(4 3/4)	3175	(6985)	17