



General Safety Belts & Accessories For: Industrial & Construction Workers

Now Also Available—Polyester Webbing. To order use P designation before Model Number. *Example:* No. P000.

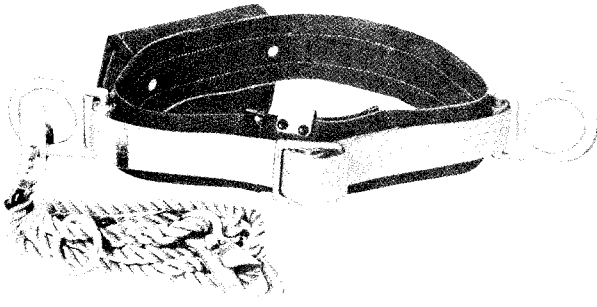

NO. 748 NYLON BELT COMBINATION Belt/Lanyard/Pouch System

A new concept in safety belt design combining a 3" wide nylon body pad, 1 $\frac{3}{4}$ " wide nylon 9,500 lb. test webbing, and an 8 foot lanyard of $\frac{1}{2}$ " diameter nylon rope and storage pouch for lanyard. The lanyard, spliced permanently to the belt has a free floating steel ring for tie off purposes. Pouch enables storage of lanyard when not in use, eliminates hazard of trailing life lines. Entire unit weighs only slightly more than 3 lbs. Locking snaphook is used with lanyard.

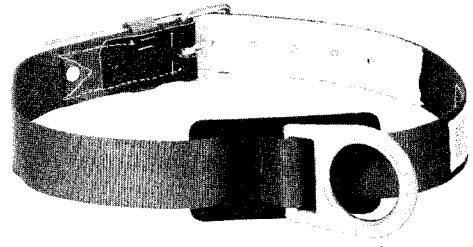


NO. 642 NYLON BELT With Adjustable "D" Ring

ALL-NYLON belt with movable "D" ring is made of 1 $\frac{3}{4}$ " wide, 9,500 lb test, nylon webbing and fitted with single tongue buckle. Buckle holes are brass grommet reinforced. Additional "D" rings and slides available.

NO. 641 NYLON BELT

Same as above, but 6 foot, $\frac{1}{2}$ " diameter nylon rope lanyard, spliced to "D" ring. Fitted with our No. 3031 snaphook.

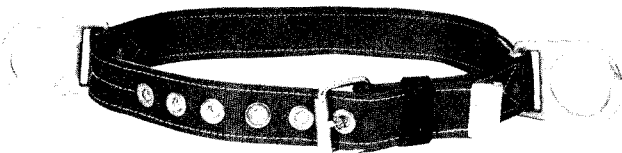


NO. 602 NYLON BELT With Single Tongue Buckle

ALL-NYLON belt is made of 1 $\frac{3}{4}$ " wide, 9,500 lb. test, nylon webbing and fitted with a single tongue buckle. Buckle holes are brass grommet reinforced, two "D" rings.

NO. 603 NYLON BELT

Same as above, but with only one "D" ring positioned in back.

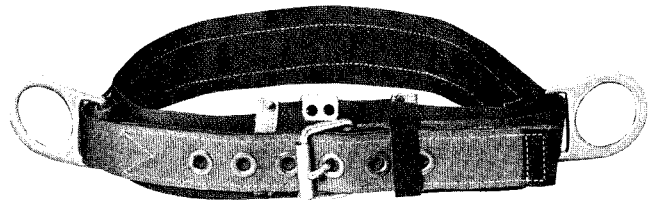

NO. 646 NYLON BELT With 3" Cushion Pad

ALL-NYLON general purpose belt with 3" wide nylon cushion pad and 1 $\frac{3}{4}$ " wide, 9,500 lb test, nylon buckle strap. Brass grommet reinforced buckle holes accommodate single tongue buckle.

NO. 647 NYLON BELT

Same as above, but with only one "D" ring positioned in back.