


Western[®] Malleable Iron Shell Blocks

FOR MANILA ROPE

- All fittings are drop forged.
- Each block is Hot Dip galvanized.
- Assembled with Self Lubricating Bronze Bushing.
- Sheave lubrication through pressure lube fitting in center pin.



HS-301-Z
SINGLE

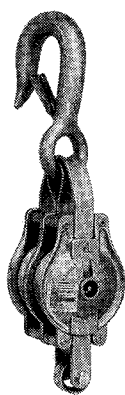


HS-302-Z
DOUBLE



HS-303-Z
TRIPLE

SEE APPLICATION AND WARNING INFORMATION



"P"
Screw Pin
Anchor Shackle

Block Size (in.)	Fitting	Single Sheave 301 Z Stock No. Galv.	Double Sheave 302 Z Stock No. Galv.	Triple Sheave 303 Z Stock No. Galv.
6	HS	694361	695101	696141
8	HS	694372	695112	696152
6	P	695010	695200	696232
8	P	695021	695221	696243

Bearing Code: Z - Self-Lubricating Bronze Bushed, with pressure lube fitting.

Block Size (in.)	Sheave Size (in.)		Diameter of Bearing	Manila Rope Size (in.)	Working Load Limit * (lbs.)			Weight Each (lbs.)		
	Outside Diam.	Rim Thickness			301 Z Single	302 Z Double	303 Z Triple	301 Z Single	302 Z Double	303 Z Triple
6	3.50	1.00	3/4	3/4	2000	3300	4000	5.50	9.25	12.50
8	4.75	1.13	1	7/8 - 1	3300	5100	7000	10.00	16.50	22.00

* Ultimate load is 3.5 times the Working Load Limit.