


Gold Standard® Anchor Shackles



No. 320
Safety Pin Shackle

Available 1/2" - 4 1/2"

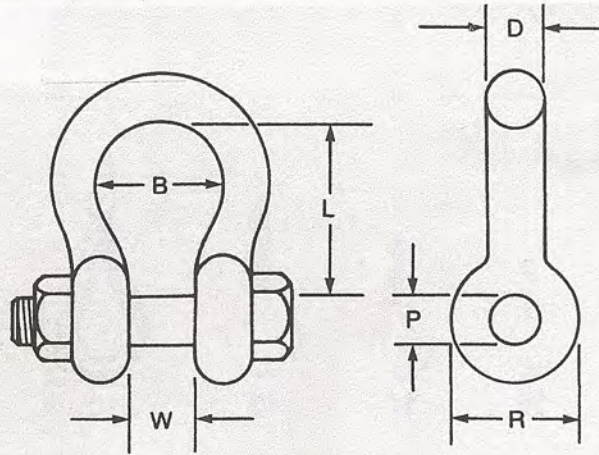


No. 263
Screwpin Shackle Eyed Pin

Available 1/2" - 3"



No. 264
Screwpin Shackle Hex Head Pin or Marine Hex Head

Available 1/2" - 3"

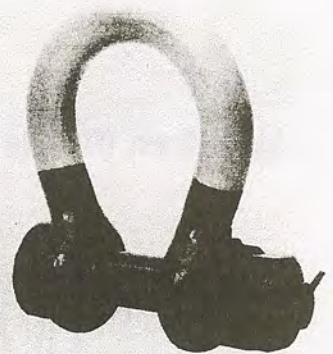

No. 330
Towing Shackle Double Nut and Locking Bolts

Available 1/2" - 4"

Anchor Shackles

Size	SWL ¹ (Tons)	Nominal D	W	Tol. ±	L	Tol. ±	B	R	P	WT. ² (lbs)
1/2"	4	5/16"	13/16"	± 1/16"	1 7/8"	± 1/16"	1 1/32"	1 7/16"	5/8"	.75
5/8"	6	3/4"	1 1/16"	± 1/16"	2 1/2"	± 1/16"	1 1/4"	1 5/8"	3/4"	1.5
3/4"	9	7/8"	1 1/4"	± 1/16"	2 7/8"	± 1/16"	2"	1 7/16"	7/8"	2.2
7/8"	12	1"	1 7/16"	± 1/16"	3 5/16"	± 1/16"	2 5/16"	2 1/8"	1"	3.7
1"	16	1 1/8"	1 11/16"	± 1/16"	3 3/4"	± 1/16"	2 11/16"	2 1/4"	1 1/8"	5.5
1 1/8"	18	1 1/8"	1 13/16"	± 1/16"	4 1/4"	± 1/16"	2 15/16"	2 5/8"	1 1/4"	7.2
1 1/4"	21	1 1/4"	2 1/32"	± 1/16"	4 5/8"	± 1/16"	3 1/4"	3"	1 3/8"	10.5
1 3/8"	26	1 3/8"	2 1/4"	± 1/16"	5 1/4"	± 1/16"	3 5/8"	3 1/4"	1 1/2"	13.8
1 1/2"	31	1 1/2"	2 5/8"	± 1/16"	5 5/8"	± 1/16"	3 7/8"	3 7/16"	1 5/8"	18.5
1 5/8"	35	1 5/8"	2 5/8"	± 1/16"	6 1/4"	± 1/16"	4 5/8"	4"	1 3/4"	23
1 3/4"	41	1 3/4"	2 7/8"	± 1/16"	7"	± 1/16"	5"	4 1/4"	2"	29.5
2"	52	2"	3 1/4"	± 1/16"	7 3/4"	± 1/16"	5 3/4"	5"	2 1/4"	42.0
2 1/4"	67	2 1/4"	3 7/8"	± 1/16"	9 1/4"	± 1/16"	6 1/2"	5 5/8"	2 1/2"	60.0
2 1/2"	82	2 1/2"	4 1/8"	± 1/16"	10 1/2"	± 1/16"	7 1/4"	5 7/8"	2 3/4"	90.0
2 3/4"	104	2 3/4"	4 1/2"	± 1/16"	11 1/2"	± 1/16"	7 1/2"	6 1/4"	3"	115
3"	117	3"	5"	± 1/16"	13"	± 1/16"	7 7/8"	6 1/2"	3 1/4"	150
3 1/2"	150	3 1/2"	5 3/4"	± 1/16"	15"	± 1/16"	9 1/2"	8"	3 3/4"	250
4"	175	4"	6 1/2"	± 1/16"	17"	± 1/16"	11"	9"	4 1/4"	350
4 1/2"	210	4 1/2"	7 1/4"	± 1/16"	19"	± 1/16"	12 1/2"	9 3/4"	5 1/8"	475

¹Design factor is 5 to 1